


102MH



合金钢

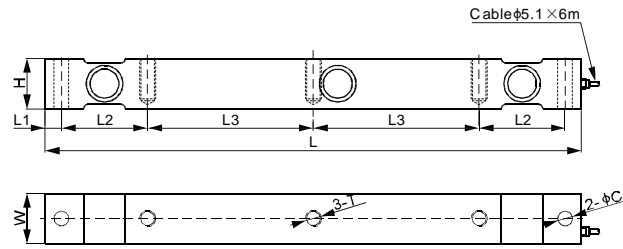

尺寸

量程	C	H	L	L1	L2	L3	W	T
kg/mm								
25,000	18.0	62.0	660	20.0	106	204	62.0	M20 Depth35
lb/inches(由上述尺寸转换)								
55,115	0.71	2.44	26.0	0.79	4.17	8.03	2.44	M20 Depth1.38

技术参数

相关量程	kg	25t	
产品毛重	kg/lb	19 / 43	
灵敏度	mV/V	2.0 ± 0.25%	<ul style="list-style-type: none"> ● Exc+ 红 ● Sig+ 绿 ● Exc- 黑 ● Sig- 白 ● 屏蔽线
零位输出	mV/V	± 0.06	
非线性	%	< ± 0.030	
重复性	%	< ± 0.017	
滞后误差	%	< ± 0.023	
蠕变	%	< ± 0.023	
阻抗	Ω	700 ± 10	
额定激励电压	V(DC/AC)	10 (15V 最大)	
绝缘阻抗	GΩ	> 2 [50 VDC]	
正常工作温度范围	°C/°F	-10...40 / 14...104	
安全极限载荷	% of full scale	150	
破坏极限载荷	% of full scale	300	
密封方式		胶封, IP67	

可 选

- 耐高温 120°C [248°F]
- 六线制

双剪切梁称重传感器