


101BH



合金钢

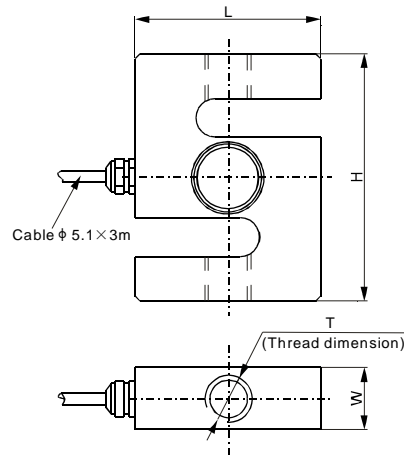


尺寸

量程	H	L	W	T
kg/mm				
50...200	76.2	50.8	19.0	M12X1.75
300...1,500; SE2,000**	76.2	50.8	28.2	M12X1.75
2,000...5,000	108.0	76.2	25.4	M18X1.50
10,000	177.8	125.0	50.8	M30X2.00
lb/inches (由上述尺寸转换)				
110.23...440.92	3.00	2.00	0.75	M12X1.75
661.39...3,306.9; SE4,409.2**	3.00	2.00	1.11	M12X1.75
4,409.2...11,023.1	4.25	3.00	1.00	M18X1.50
22,046.2	7.00	4.92	2.00	M30X2.00

技术参数

相关量程	kg	50; 100; 200	300; 500; 1t; SE2t	2t; 3t; 5t	10t
产品毛重	kg/lb	0.6 / 1.2	0.8 / 1.7	1.4 / 3.1	7.4 / 16.3
灵敏度	mV/V	2.0 ± 1%			
零位输出	mV/V	± 0.04			
非线性	%	< ± 0.017			
重复性	%	< ± 0.017			
滞后误差	%	< ± 0.017			
蠕变	%	< ± 0.023			
阻抗	Ω	400 ± 25			
额定激励电压	V(DC/AC)	10 (15V 最大)			
绝缘阻抗	GΩ	> 2 [50 VDC]			
正常工作温度范围	°C/°F	-10...40 / 14...104			
安全极限载荷	% of full scale	200			
破坏极限载荷	% of full scale	300			
密封方式		密封, IP66/IP67			



可 选

- 耐高温 120°C [248°F]
- 六线制
- 不锈钢 101BSGS

可 互 换 产 品

制造商	型号
Vishay TedeA-Huntleigh	615
Vishay TedeA-Huntleigh	616