


102AH



合金钢

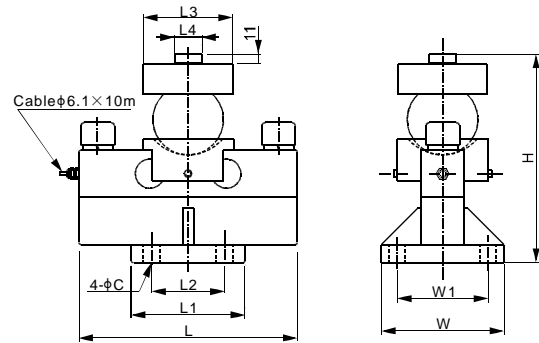


CE Ex RoHS IP 67

尺寸

量程	C	H	L	L1	L2	L3	L4	W	W1
kg/mm									
5,000...30,000	18.0	229.3	240.0	125.0	80.0	98.0	30.0	135.0	100.0
50,000	21.0	251.3	340.0	160.0	124.0	98.0	40.0	160.0	124.0
lb/inches (由上述尺寸转换)									
11,023.1...66,138.7	0.71	9.03	9.45	4.92	3.15	3.86	1.18	5.31	3.94
110,231.1	0.83	9.89	13.39	6.30	4.88	3.86	1.57	6.30	4.88

技术参数

相关量程	kg	5t; 10t; 15t	20t; 25t; 30t	50t
产品毛重	kg/lb	16 / 36	17 / 37	31 / 68
灵敏度	mV/V	2.0 ± 0.25%		
零位输出	mV/V	± 0.04		
非线性	%	< ± 0.023		
重复性	%	< ± 0.017		
滞后误差	%	< ± 0.023		
蠕变	%	< ± 0.023		
阻抗	Ω	770 ± 30		
额定激励电压	V(DC/AC)	10 (15V 最大)		
绝缘阻抗	GΩ	> 2 [50 VDC]		
正常工作温度范围	°C/°F	-10...40 / 14...104		
安全极限载荷	% of full scale	150		
破坏极限载荷	% of full scale	300		
密封方式		密封, IP67		



可选

- 耐高温 120°C [248°F]
- 防雷击和大电流