


合金钢

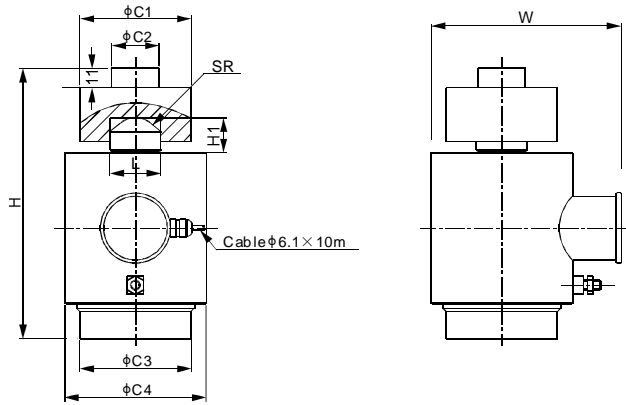


CE RoHS

尺寸

量程	C1	C2	C3	C4	H	H1	L	SR	W
kg/mm									
5,000...50,000	70.0	30.0	70.0	89.0	169.5	31.5	40.0	37.5	108.5
lb/inches (由上述尺寸转换)									
11,023.1...110,231.1	2.76	1.18	2.76	3.50	6.67	1.24	1.57	1.48	4.27

技术参数

相关量程	kg	5t; 10t; 20t; 30t; 50t
产品毛重	kg/lb	5 / 11
灵敏度	mV/V	1.5 ± 0.25%
零位输出	mV/V	± 0.05
非线性	%	< ± 0.023
重复性	%	< ± 0.017
滞后误差	%	< ± 0.017
蠕变	%	< ± 0.023
阻抗	Ω	700 ± 5
额定激励电压	V(DC/AC)	10 (15V 最大)
绝缘阻抗	GΩ	> 2 [50 VDC]
正常工作温度范围	°C/°F	-10...40 / 14...104
安全极限载荷	% of full scale	150
破坏极限载荷	% of full scale	300
密封方式		密封, IP67



- Exc+ 红
- Sig+ 绿
- Exc- 黑
- Sig- 白
- 屏蔽线

可 选

- 六线制