



108CA



铝合金

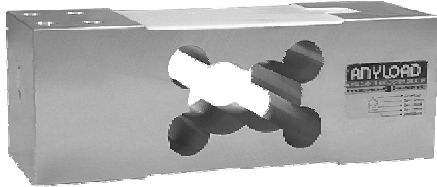

CE RoHS

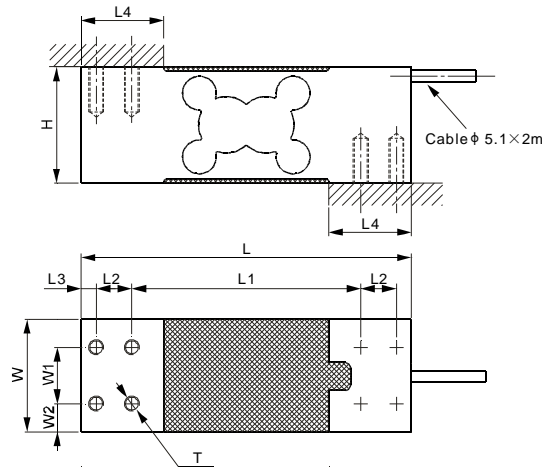


尺寸

量程	H	L	L1	L2	L3	L4	W	W1	W2	T
kg/mm 10...1,000	62.0	176.0	122.0	19.0	8.0	44.0	60.0	30.0	15.0	8-M8 Depth25
lb/inches (由上述尺寸转换) 22...2,204.6	2.44	6.93	4.80	0.75	0.31	1.73	2.36	1.18	0.59	8-M8 Depth0.98

技术参数

准确度等级		-	C3	C3 / NTEP 1:5 000 Class III, Single Cell pending
相关量程	kg	10; 20; 30	60; 100; 150; 200; 250; 300	500; 600; 750; 1t
产品毛重	kg/lb	1.5 / 3.3		
推荐最大台面尺寸	mm	600×700		
灵敏度	mV/V	2 ± 10%		
零位输出	mV/V	± 0.06		
非线性*	%	< ± 0.017		
重复性*	%	< ± 0.017		
滞后误差*	%	< ± 0.017		
蠕变	%	< ± 0.023		
阻抗	Ω	415 ± 15		
额定激励电压	V(DC/AC)	10 (15V 最大)		
绝缘阻抗	GΩ	> 1 [50 VDC]		
正常工作温度范围	°C/°F	-10...40 / 14...104		
安全极限载荷	% of full scale	150		
破坏极限载荷	% of full scale	300		
密封方式		密封, IP66		
推荐安装方式		内六角螺钉: M8-12.9 紧扭力: 42Nm		



*非线性、重复性和滞后误差等参数为典型的参数,以上参数最终符合 OIML R60 误差带的要求

单点式称重传感器

可互换产品

制造商	型号
HBM	PW24A
Vishay Tedea-Huntleigh	1263