


CE RoHS IP66

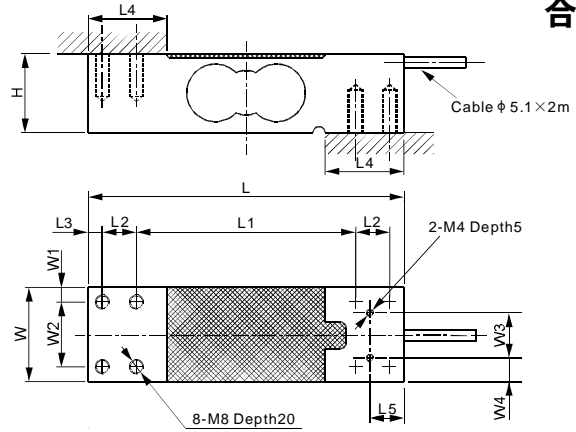

尺寸

量程	H	L	L1	L2	L3	L4	L5	W	W1	W2	W3	W4
kg/mm												
300...1,000	40.0	200.0	131.0	25.0	9.5	50.0	25.0	50.0	7.5	35.0	25.0	12.5
lb/inches (由上述尺寸转换)												
661.4...2,204.6	1.57	7.87	5.16	0.98	0.37	1.97	0.98	1.97	0.30	1.38	0.98	0.49

技术参数

相关量程	kg	300; 400; 500; 750; 1t
产品毛重	kg/lb	3 / 6
推荐最大台面尺寸	mm	600×700
灵敏度	mV/V	2 ± 10%
零位输出	mV/V	± 0.06
非线性	%	< ± 0.017
重复性	%	< ± 0.017
滞后误差	%	< ± 0.017
蠕变	%	< ± 0.023
阻抗	Ω	400 ± 25
额定激励电压	V(DC/AC)	10 (15V 最大)
绝缘阻抗	GΩ	> 1 [50 VDC]
正常工作温度范围	°C/°F	-10...40 / 14...104
安全极限载荷	% of full scale	300
破坏极限载荷	% of full scale	500
密封方式		密封, IP66

