

RoHS


尺寸

量程	C1	C2	H	H1	T1	T2
247AA:						
kg/mm						
1...20	20.0	15.0	11.0	4.0	M3	M3 Depth4.0
lb/inches (由上述尺寸转换)						
2.20...44.09	0.79	0.59	0.43	0.16	M3	M3 Depth0.16
247AS:						
kg/mm						
50...200	20.0	15.0	11.0	4.0	M3	M3 Depth5.0
500...2,000	25.4	18.0	15.0	5.0	M5	M4 Depth7.0
5,000	40.0	32.0	25.0	8.0	M12	M4 Depth6.0
lb/inches (由上述尺寸转换)						
110.23...440.92	0.79	0.59	0.43	0.16	M3	M3 Depth0.20
1,102.3...4,409.2	1.00	0.71	0.59	0.20	M5	M4 Depth0.28
11,023.1	1.57	1.26	0.98	0.31	M12	M4 Depth0.24

技术参数

相关量程	kg	1; 2; 3; 4; 5; 10; 20	50; 100; 150; 200; 500; 1t; 2t	5t
产品毛重	kg/lb	0.04 / 0.09	0.07 / 0.15	0.21 / 0.46
灵敏度	mV/V	1.0 ± 20%	1.5 ± 20%	
零位输出	mV/V	±0.5		
非线性	%	< ±0.5		
重复性	%	< ±0.3		
滞后误差	%	< ±0.5		
蠕变	%	< ±0.5		
阻抗	Ω	350 ± 3		
额定激励电压	V(DC/AC)	6 (12V 最大)		
绝缘阻抗	GΩ	> 2 [50 VDC]		
正常工作温度范围	°C/°F	-10...40 / 14...104		
安全极限载荷	% of full scale	150		
破坏极限载荷	% of full scale	300		
密封方式		密封, IP66		

应用举例 (图解)

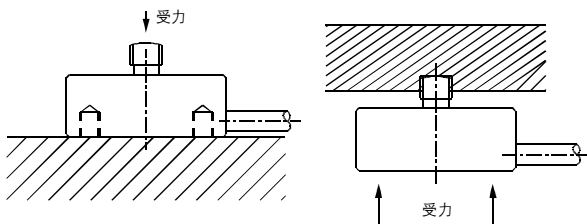

\* 量程 ≥ 50kg